


EXTERNAL VIBRATOR AR 64 SERIES



APPLICATIONS
Perfect for use in precast factories

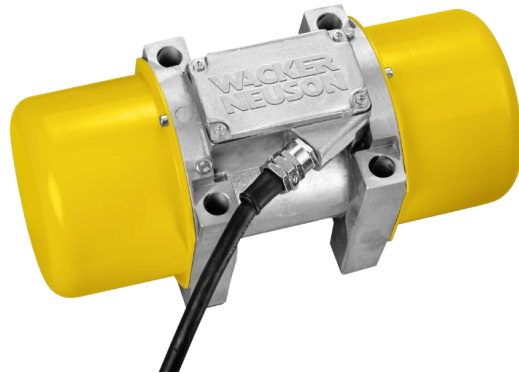

OPERATING DATA

MODEL	AR 64/6/042	AR64/9/042	AR 64/6/250
VIBRATIONS (rpm)	6000	9000	6000
STANDARD CENTRIFUGAL FORCE (kN)	10.36	9.88	30.36
CENTRIFUGAL FORCE MAX. (kN)	19.03	18.14	19.03
RATED VOLTAGE 3~ (V)	42	42	250
RATED CURRENT (A)	21.5	16	3.3
WEIGHT	13.8	12.9	13.8
FASTENING	120 x 120	120 x 120	120 x 120
L x W x H (mm)	245 x 150 x 188		