


EXTERNAL VIBRATOR

AR 75/6/042 / AR 75/6/250

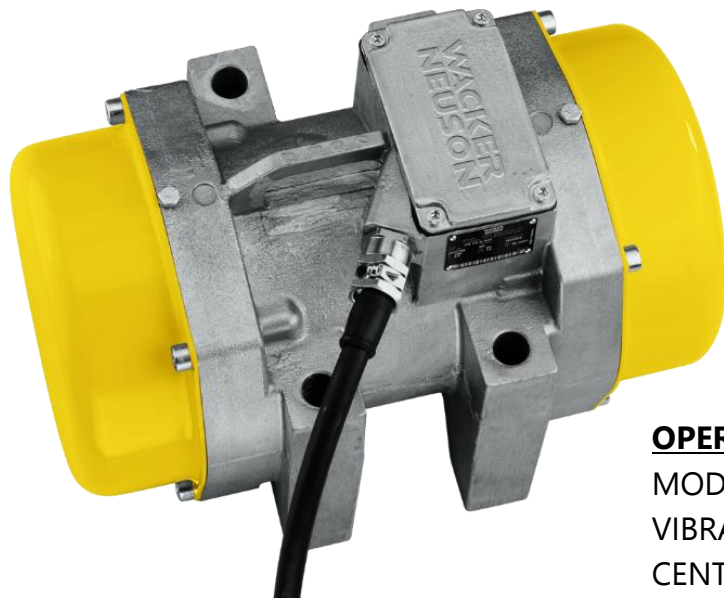

APPLICATIONS

Perfect for use with precast concrete elements

OPERATING DATA

MODEL	AR 75/6/042	AR 75/6/250
VIBRATIONS (rpm)	6000	6000
CENTRIFUGAL FORCE MAX. (kN)	18.21	18.21
RATED VOLTAGE 3~ (V)	42	250
RATED CURRENT (A)	32	7.5
FASTENING	Flange	
L x W x H (mm)	330 X 218 X 218	
STANDARD CENTRIFUGAL FORCE (kN)	12.04	12.04